


LM-DH5000 MOBILE UNITS

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
LM-DH5000	5,000	Gas or Electric	147"	50 1/2"	85"	4500 lbs
LM-DH5000	5,000	Dual	169"	50 1/2"	85"	5200 lbs

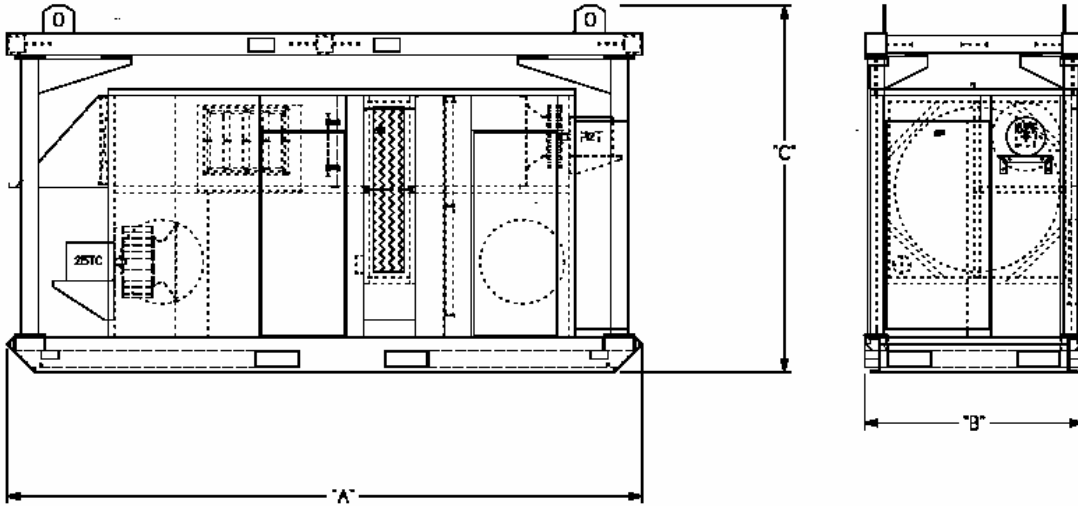

Air Volume	Static Pressure External	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
5,000	2.0	136	392	115	331	75	216

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 60/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
3/4"	7-14" w.c.	7-14" w.c.		460V/138,600V/115	13	40	



Available Accessories:

- Remote Humidistat
- 20" Round Flex Duct
- 5.0 Static Pressure External